

Utility Scale Experiment III

2024/07/19

Tamiya Onodera, Kifumi Numata, Toshinari Itoko

IBM Research – Tokyo

Outline

- A brief lecture on GHZ states [by Tamiya]
 - preparing them on real devices

<Break>

- A jupyter notebook session [by Kifumi]
 - simpler examples
 - your assignment

≡ Greenberger–Horne–Zeilinger state


🌐 5 languages ▼

Article [Talk](#)

[Read](#) [Edit](#) [View history](#) [Tools](#) ▼

From Wikipedia, the free encyclopedia

In [physics](#), in the area of [quantum information theory](#), a **Greenberger–Horne–Zeilinger state (GHZ state)** is a certain type of [entangled quantum state](#) that involves at least three subsystems (particle states, [qubits](#), or [qudits](#)). The four-particle version was first studied by [Daniel Greenberger](#), [Michael Horne](#) and [Anton Zeilinger](#) in 1989, and the three-particle version was introduced by [N. David Mermin](#) in 1990.

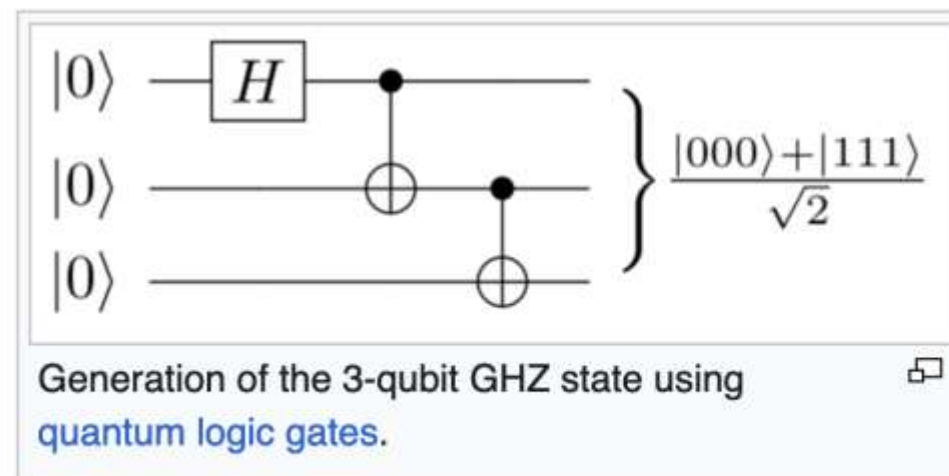

https://en.wikipedia.org/wiki/Greenberger%E2%80%93Horne%E2%80%93Zeilinger_state

The Nobel Prize in Physics 2022



Ill. Niklas Elmehed © Nobel Prize Outreach

Alain Aspect


Prize share: 1/3



Ill. Niklas Elmehed © Nobel Prize Outreach

John F. Clauser

Prize share: 1/3

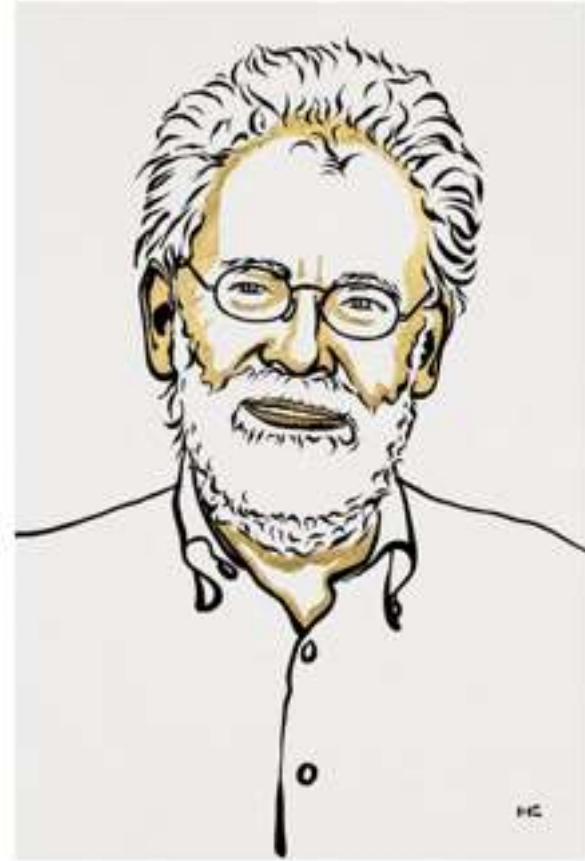

Ill. Niklas Elmehed © Nobel Prize Outreach

Anton Zeilinger

Prize share: 1/3

You learnt it on Lecture 2! (Quantum Bits, Gates, and Circuits)

 jupyter 20240419_UTokyo Last Checkpoint: 2 months ago



File Edit View Run Kernel Settings Help

Trusted

 +        Markdown ▾

JupyterLab   Python 3 (ipykernel)  

GHZ state

GHZ state (Greenberger-Horne-Zeilinger state) is a maximally entangled state of three or more qubits. GHZ state for three qubits is defined as

$$\frac{1}{\sqrt{2}}(|000\rangle + |111\rangle)$$

It can be created with the following quantum circuit.


```
[32]: qc = QuantumCircuit(3,3)

qc.h(0)
qc.cx(0,1)
qc.cx(1,2)

qc.measure(0, 0)
qc.measure(1, 1)
qc.measure(2, 2)

qc.draw("mpl")
```

[32]:

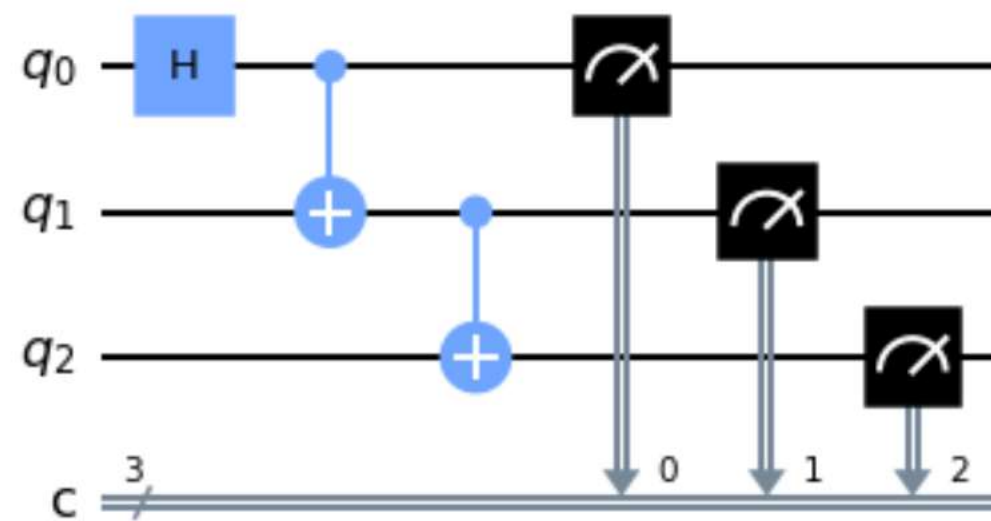

You learnt it on Lecture 2! (Quantum Bits, Gates, and Circuits)

Exercise 2

The GHZ state of the 8 quantum bits is as follows

$$\frac{1}{\sqrt{2}}(|00000000\rangle + |11111111\rangle).$$

Let's create this state with the shallowest circuit. The depth of the shallowest quantum circuit is 5 with the measurement gates combined.

```
[45]: # Step 1
qc = QuantumCircuit(8,8)


##your code goes here##

qc.h(0); qc.cx(0,4)
qc.cx(0,2); qc.cx(4,6)
qc.cx(0,1); qc.cx(2,3); qc.cx(4,5); qc.cx(6,7)


# measure
for i in range(8):
    qc.measure(i, i)

qc.draw("mpl")
#print(qc.depth())
```

[45]:

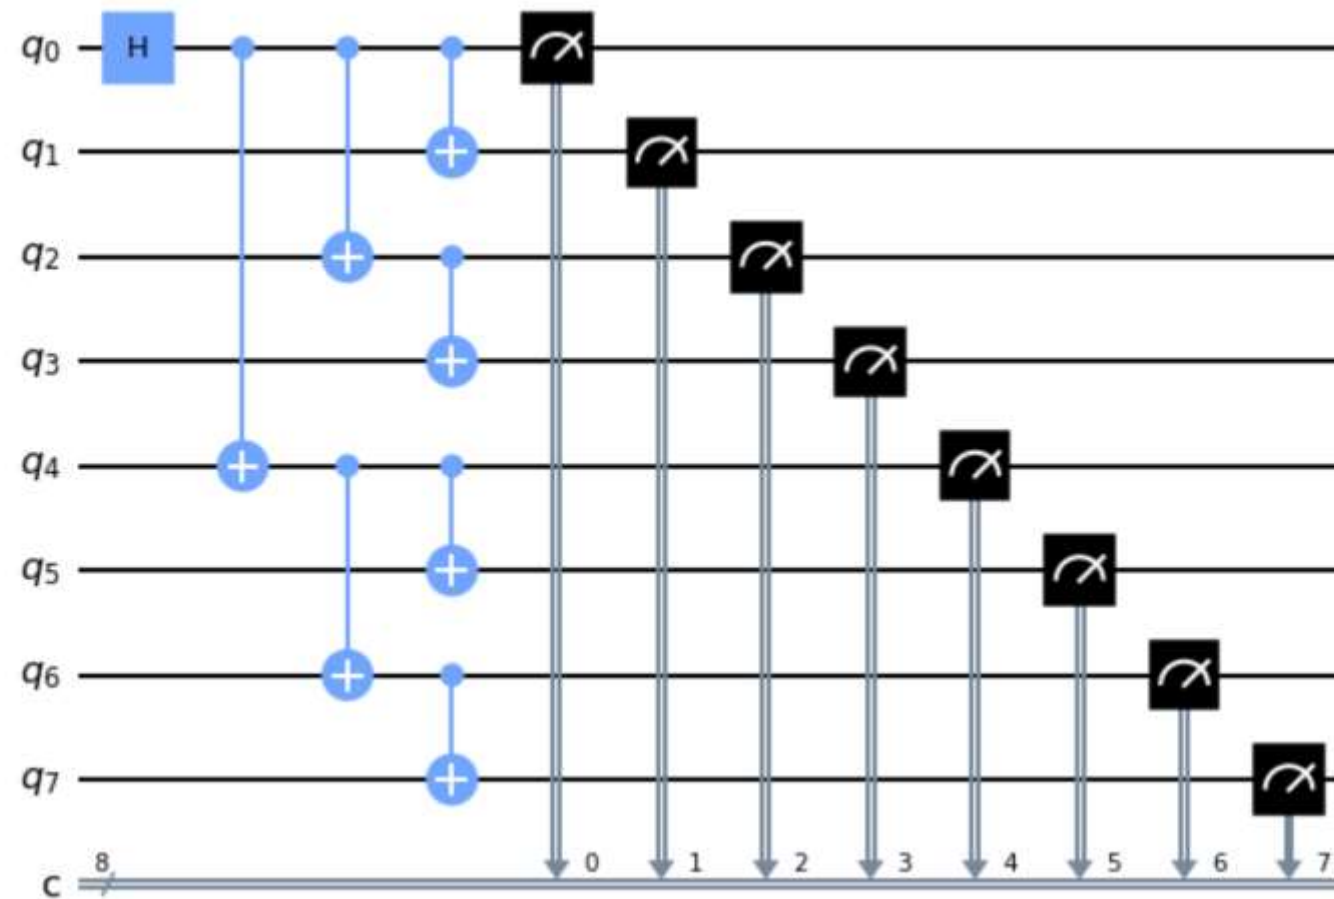



You learnt more on Lecture 10! (Quantum Circuit Optimization)

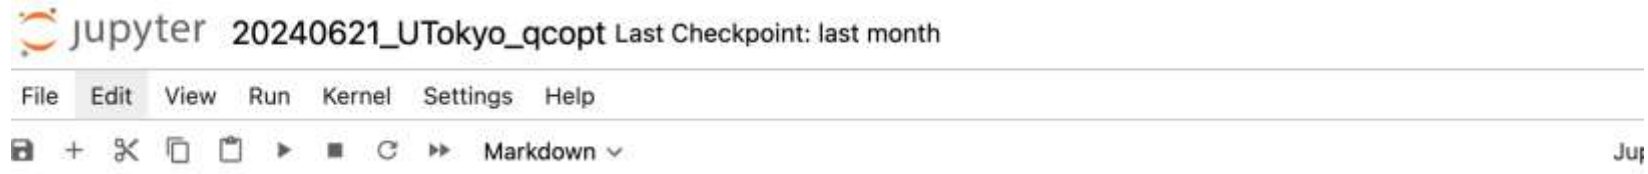

Part 1. Running GHZ circuits with different optimization levels

Circuit optimization matters

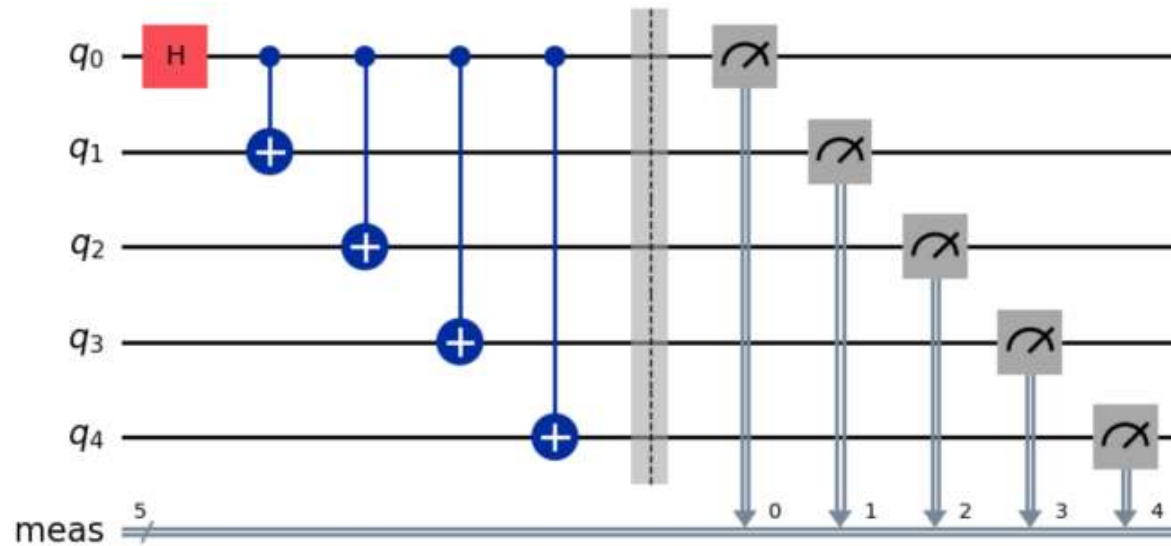

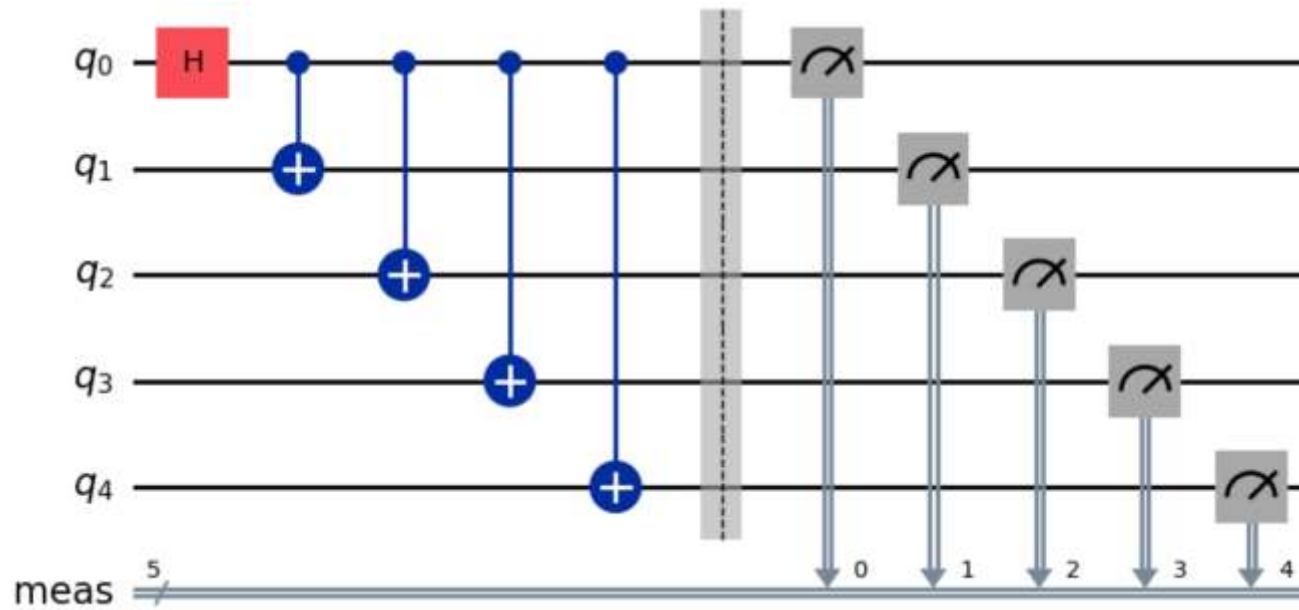


```
for c in [circ0, circ1, circ2]:
    print(c.count_ops())
```

```
OrderedDict({'rz': 77, 'sx': 40, 'ecr': 19, 'measure': 5, 'x': 4, 'barrier': 1})
OrderedDict({'rz': 26, 'sx': 17, 'ecr': 10, 'measure': 5, 'x': 4, 'barrier': 1})
OrderedDict({'rz': 27, 'sx': 13, 'ecr': 7, 'measure': 5, 'x': 1, 'barrier': 1})
```


You learnt more on Lecture 10! (Quantum Circuit Optimization)

Circuit synthesis matters

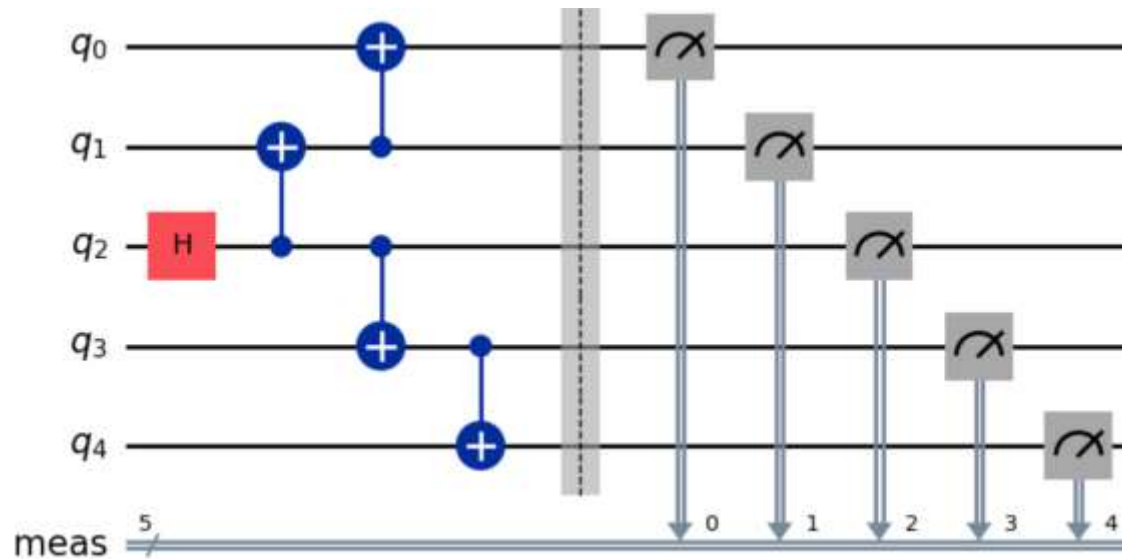

```
for c in [circ_org, circ_new]:  
    print(c.count_ops())
```

```
OrderedDict({'rz': 27, 'sx': 13, 'ecr': 7, 'measure': 5, 'x': 1, 'barrier': 1})  
OrderedDict({'rz': 19, 'sx': 10, 'measure': 5, 'ecr': 4, 'x': 1, 'barrier': 1})
```

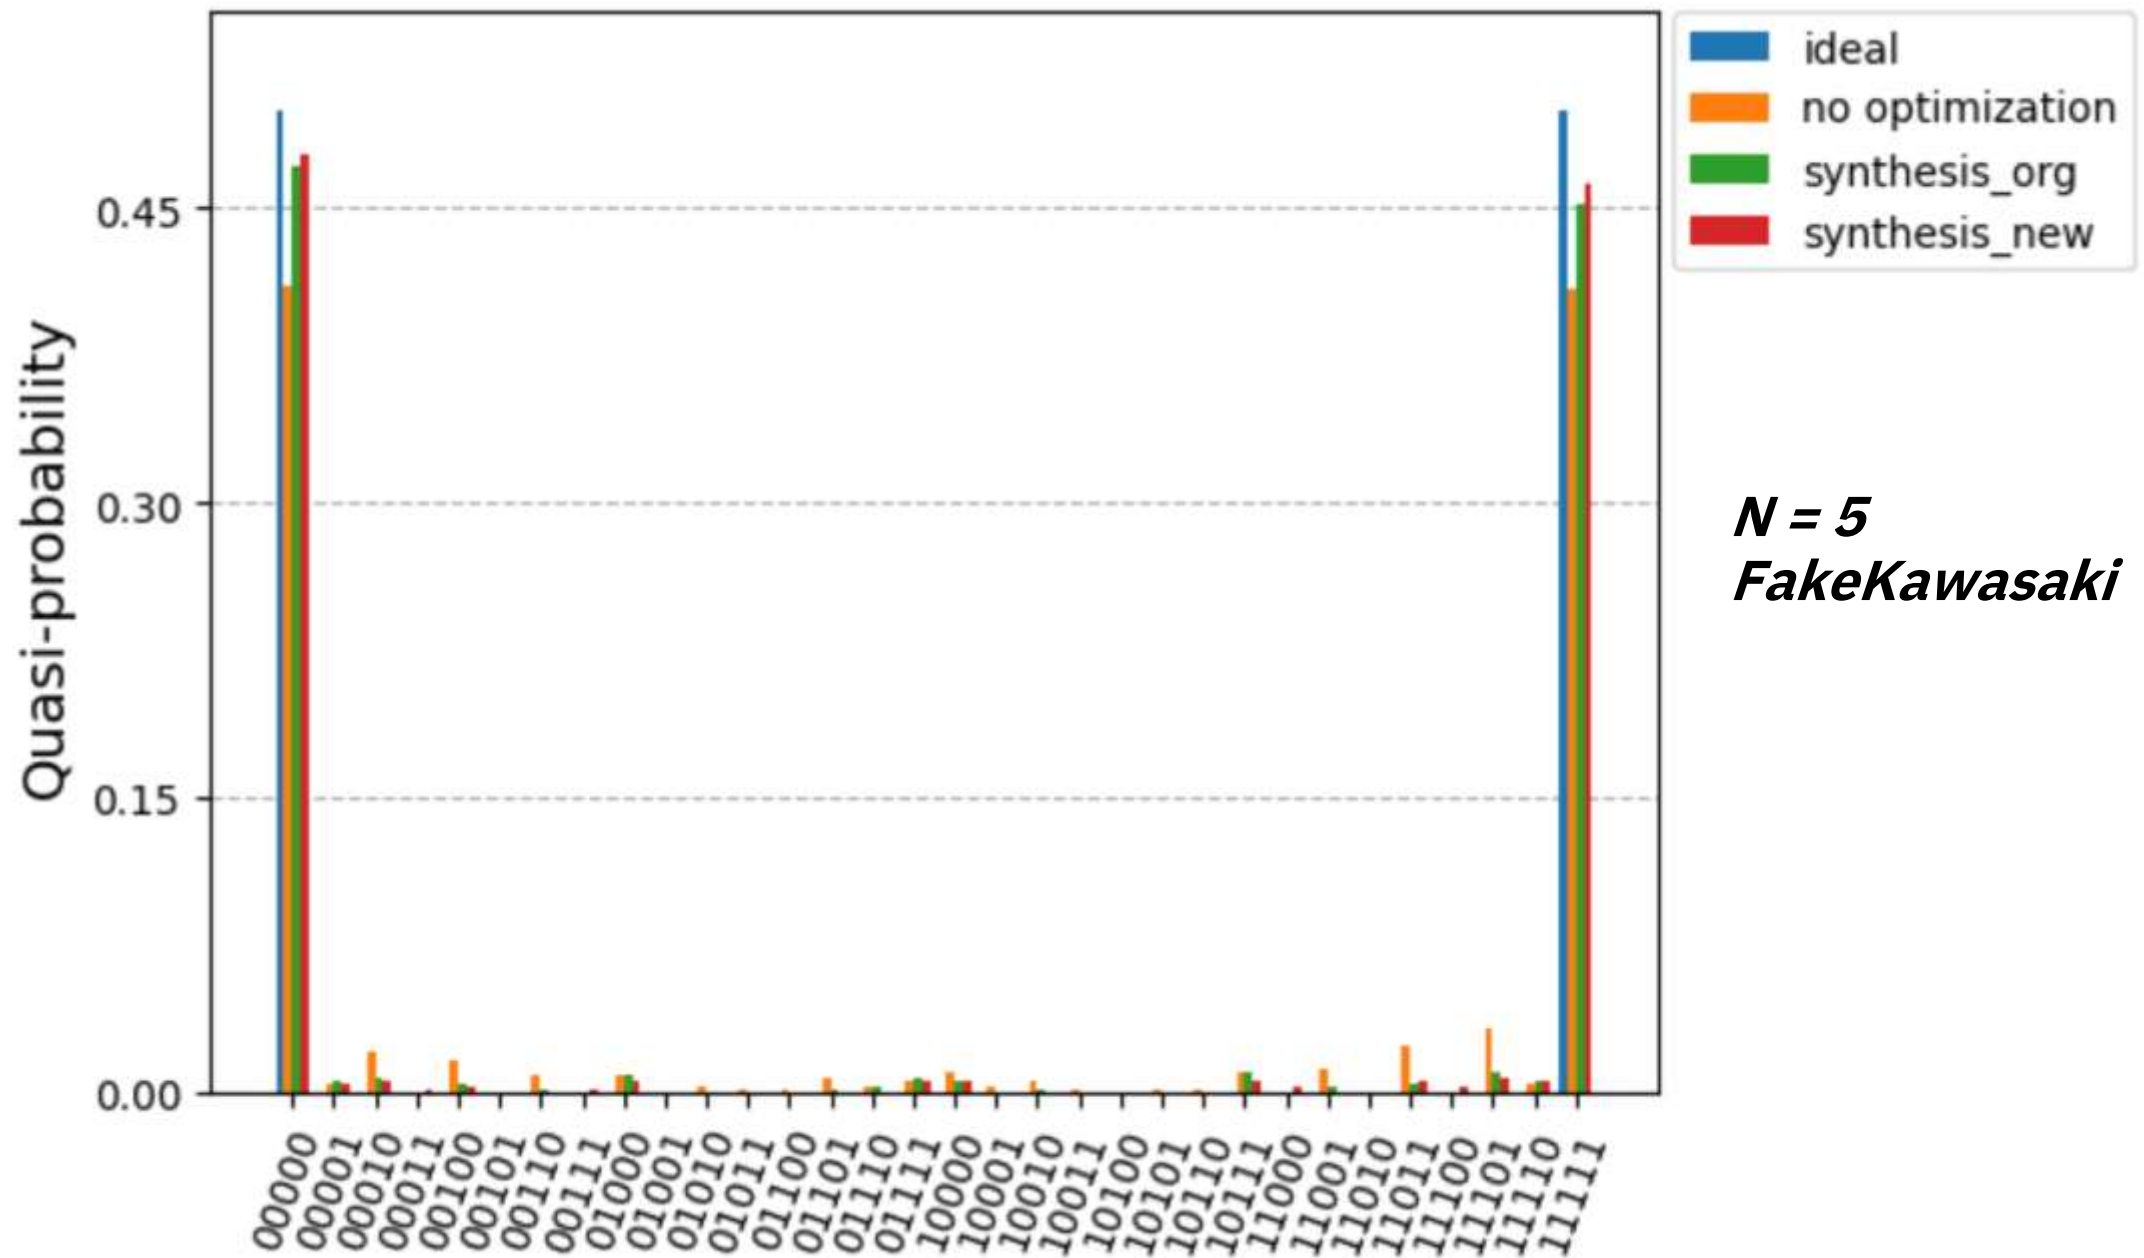

Let us prepare a large GHZ state on a real device!

Why a large GHZ state?

- Many think it serves as a benchmark of a near-term quantum computer.
- Some use it as a benchmark of an algorithm / methodology.
 - e.g., error mitigation

This is an active area of research.

18-qubit GHZ on a superconducting QC (2020)

PHYSICAL REVIEW A **101**, 032343 (2020)

Editors' Suggestion

Verifying multipartite entangled Greenberger-Horne-Zeilinger states via multiple quantum coherences

Ken X. Wei, ^{*} Isaac Lauer, Srikanth Srinivasan, Neereja Sundaresan, Douglas T. McClure, David Toyli, David C. McKay, Jay M. Gambetta, and Sarah Sheldon

IBM T.J. Watson Research Center, Yorktown Heights, New York 10598, USA

29-qubit GHZ on a superconducting QC (2022)

PHYSICAL REVIEW A **106**, 012423 (2022)

Efficient quantum readout-error mitigation for sparse measurement outcomes of near-term quantum devices

Bo Yang, Rudy Raymond, and Shumpei Uno

¹Graduate School of Information Science and Technology, The University of Tokyo, Bunkyo-ku, Tokyo 113-8656, Japan

²IBM Quantum, IBM Research-Tokyo, 19-21 Nihonbashi Hakozaki-cho, Chuo-ku, Tokyo 103-8510, Japan

³Quantum Computing Center, Keio University, Hiyoshi 3-14-1, Kohoku-ku, Yokohama 223-8522, Japan

⁴Mizuho Research & Technologies, Ltd, 2-3 Kanda-Nishikicho, Chiyoda-ku, Tokyo 101-8443, Japan

27-qubit GHZ on a superconducting QC (2021)

J. Phys. Commun. **5** (2021) 095004

<https://doi.org/10.1088/2399-6528/ac1df7>

Journal of Physics Communications

PAPER

Generation and verification of 27-qubit Greenberger-Horne-Zeilinger states in a superconducting quantum computer

Gary J Mooney, Gregory A L White, Charles D Hill, and Lloyd C L Hollenberg

¹ School of Physics, University of Melbourne, VIC, Parkville, 3010, Australia

² School of Mathematics and Statistics, University of Melbourne, VIC, Parkville, 3010, Australia

32-qubit GHZ on an ion-trap QC (2023)

PHYSICAL REVIEW X **13**, 041052 (2023)

Featured in Physics

A Race-Track Trapped-Ion Quantum Processor

S. A. Moses, C. H. Baldwin, M. S. Allman, R. Ancona, L. Ascarrunz, C. Barnes, J. Bartolotta, B. Bjork, P. Blanchard, M. Bohn, J. G. Bohnet, N. C. Brown, N. Q. Burdick, W. C. Burton, S. L. Campbell, J. P. Campora III, C. Carron, J. Chambers, J. W. Chan, Y. H. Chen, A. Chernoguzov, E. Chertkov, J. Colina, J. P. Curtis, R. Daniel, M. DeCross, D. Deen, C. Delaney, J. M. Dreiling, C. T. Ertsgaard, J. Esposito, B. Estey, M. Fabrikant, C. Figgatt, C. Foltz, M. Foss-Feig, D. Francois, J. P. Gaebler, T. M. Gatterman, C. N. Gilbreth, J. Giles, E. Glynn, A. Hall, A. M. Hankin, A. Hansen, D. Hayes, B. Higashi, I. M. Hoffman, B. Horning, J. J. Hout, R. Jacobs, J. Johansen, L. Jones, J. Karcz, T. Klein, P. Lauria, P. Lee, D. Liefer, S. T. Lu, D. Lucchetti, C. Lytle, A. Malm, M. Matheny, B. Mathewson, K. Mayer, D. B. Miller, M. Mills, B. Neyenhuis, L. Nugent, S. Olson, J. Parks, G. N. Price, Z. Price, M. Pugh, A. Ransford, A. P. Reed, C. Roman, M. Rowe, C. Ryan-Anderson, S. Sanders, J. Sedlacek, P. Shevchuk, P. Siegfried, T. Skripka, B. Spaun, R. T. Sprenkle, R. P. Stutz, M. Swallows, R. I. Tobey, A. Tran, T. Tran, E. Vogt, C. Volin, J. Walker, A. M. Zolot, and J. M. Pino

¹Quantinuum, 303 South Technology Court, Broomfield, Colorado 80021, USA

²Quantinuum, 1985 Douglas Drive North, Golden Valley, Minnesota 55422, USA

³Quantinuum, 12001 State Highway 55, Plymouth, Minnesota 55441, USA


⁴Honeywell Aerospace, 12001 State Highway 55, Plymouth, Minnesota 55441, USA

What matters


- Qubit mapping and routing
- Circuit depth
- Error mitigation / Error suppression

What matters



- Qubit mapping and routing
 - The interaction graph of a circuit should be **perfectly embedded** into the coupling map of a device.
 - Qubits with **lower read-out errors** and entangling gates with **lower errors** should be picked up.
 - Rely on the transpiler with a “transpiler-friendly” circuit or do it yourself!
- Circuit depth
 - A “**balanced**” tree of entangling gates should be pursued.
- Error mitigation / Error suppression

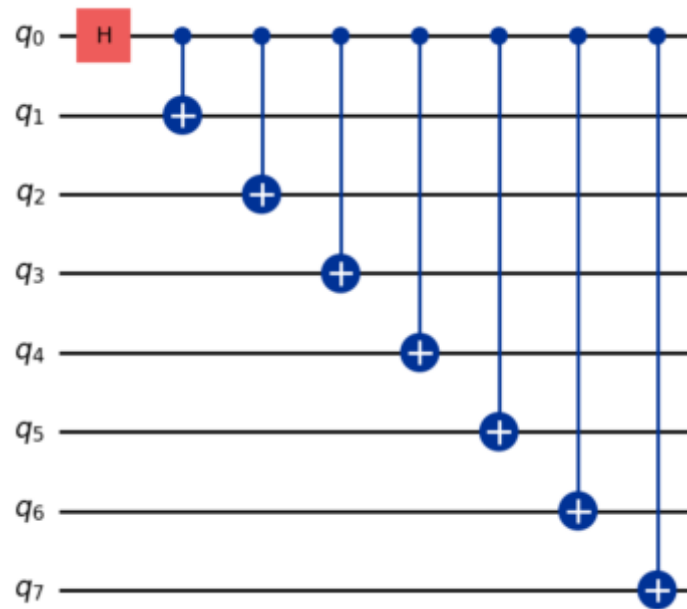

Depth: 76 (two-qubit depth 16)

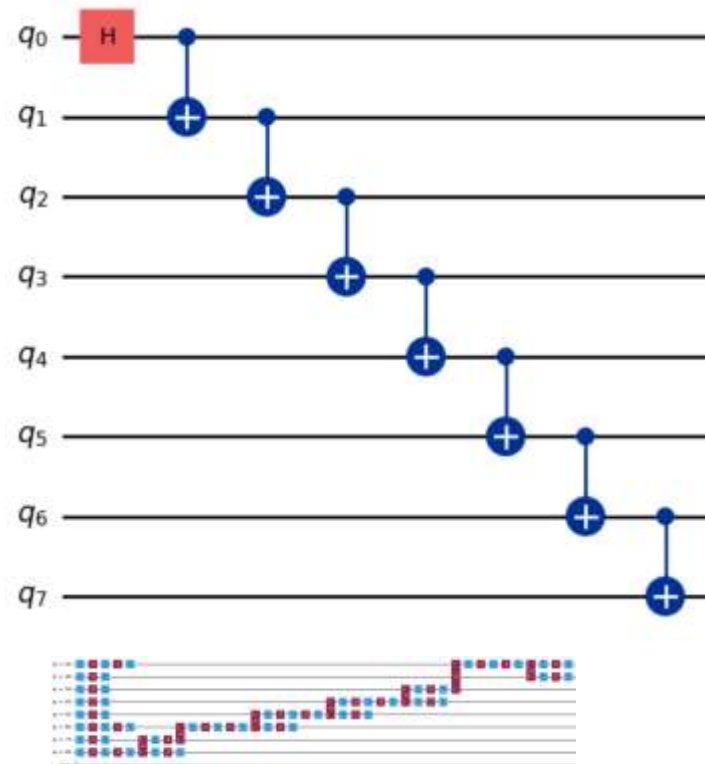

Depth: 41 (two-qubit depth 7)

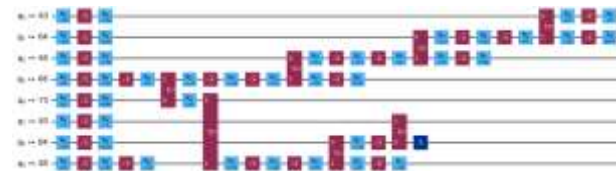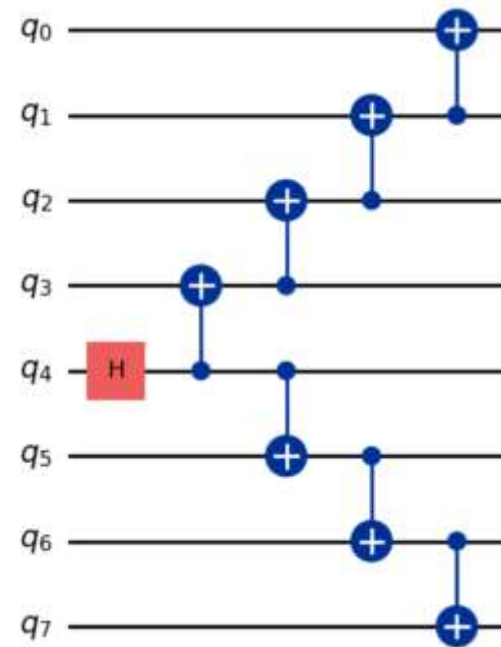

Depth: 26 (two-qubit depth 4)

You learnt this on Lecture 9! (Quantum Hardware)

Device map and calibration data

<https://quantum.ibm.com/services/resources>

ibm_kawasaki

OpenQASM 3

Details

127

Qubits

2.4%

EPLG

5K

CLOPS

Status:

Online

System region:

us-east

Total pending jobs:

210 jobs

Processor type ⓘ:

Eagle r3

Version:

2.1.28

Basis gates:

ECR, ID, RZ, SX, X

Your instance usage:

0 jobs

Median ECR error:

7.653e-3

Median SX error:

2.340e-4

Median readout error:


1.080e-2

Median T1:

183.48 us


Median T2:

138.56 us

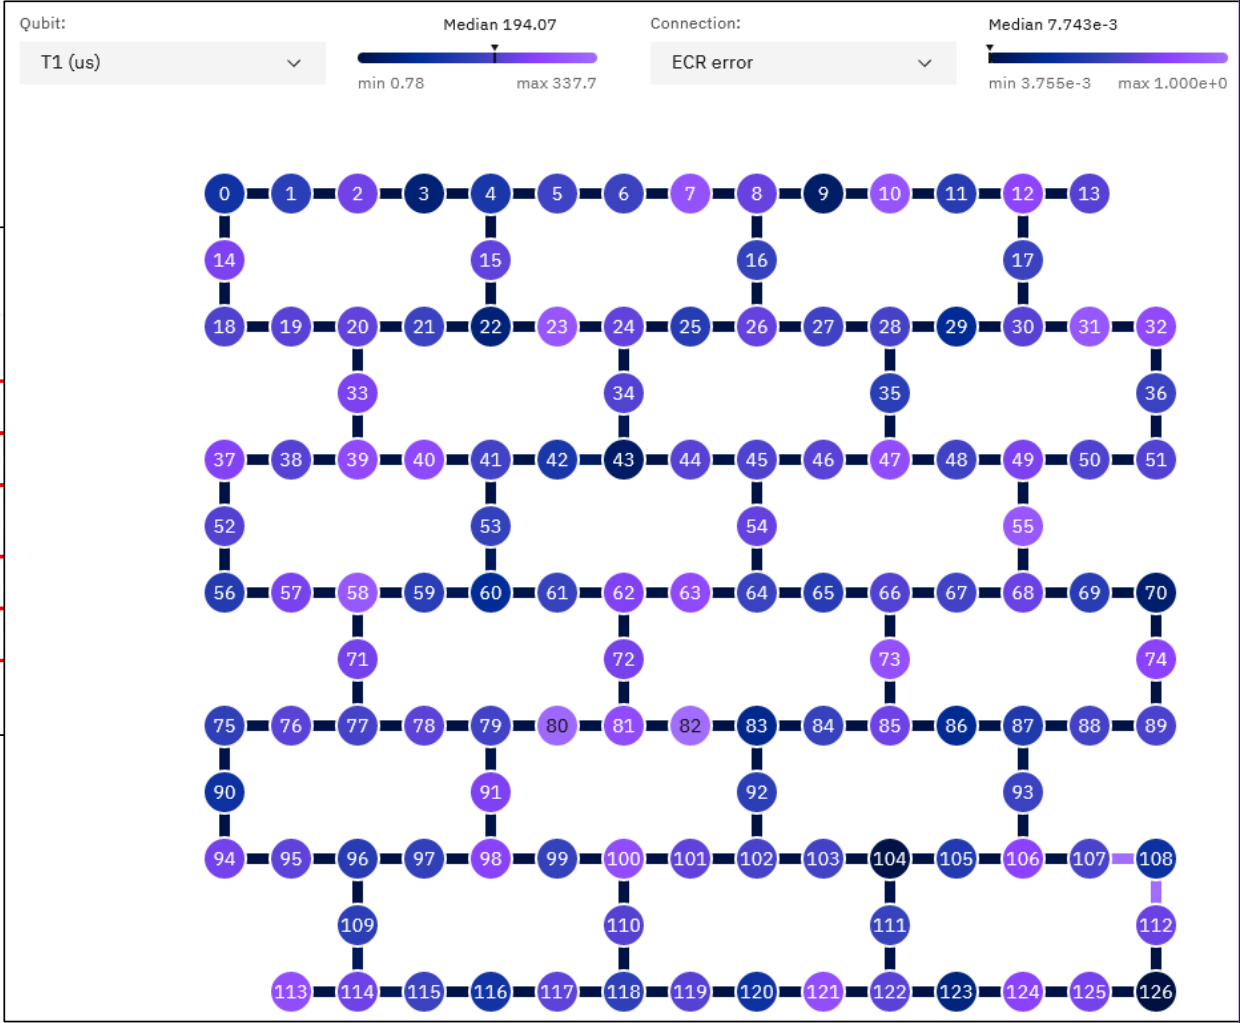


How we verify it?

$N = 6$, ibm_brisbane

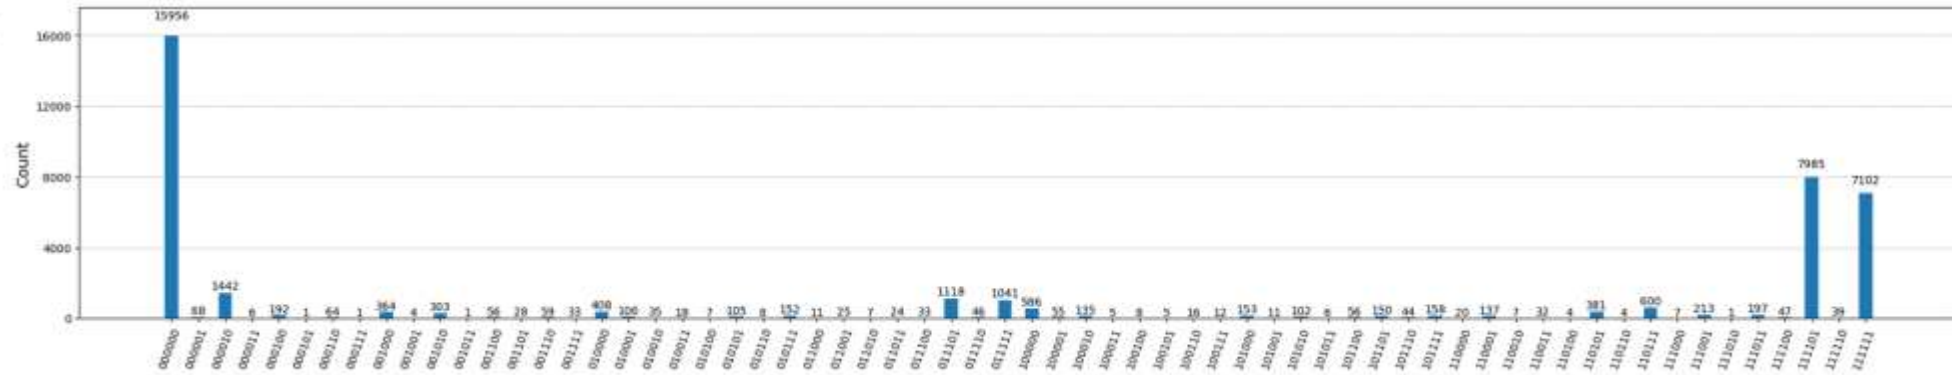

$N = 12$, ibm_brisbane

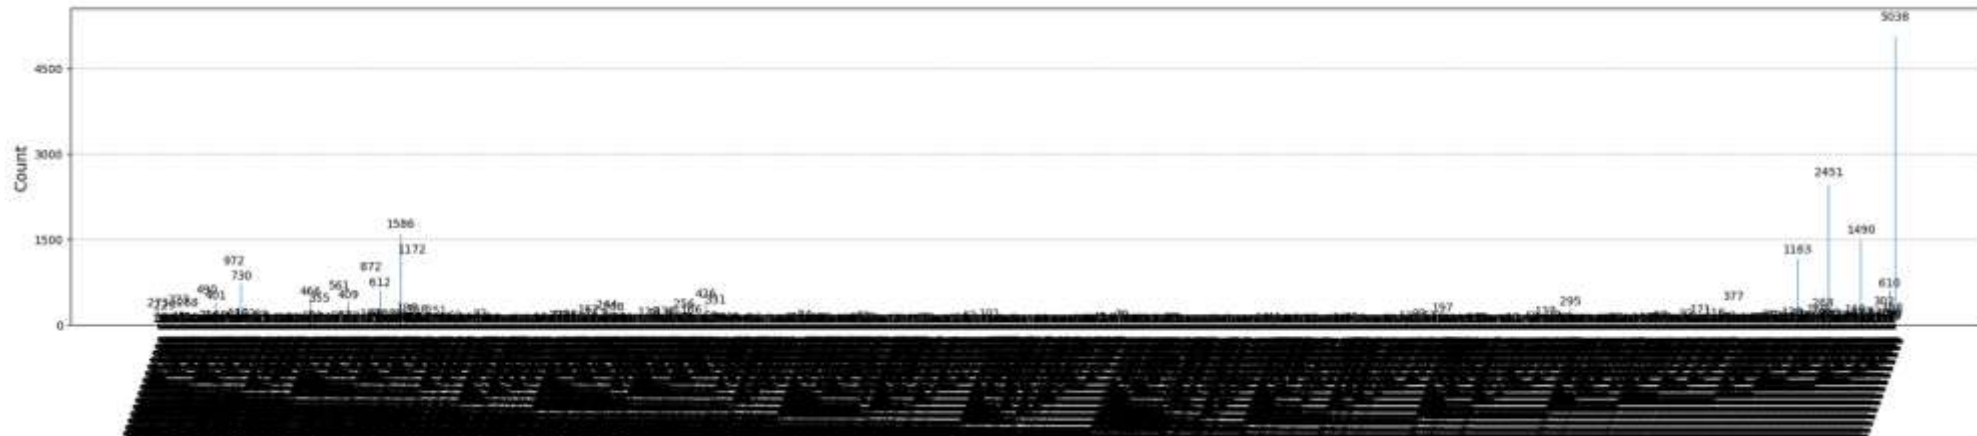

What matters

- Qubit mapping and routing
 - The interaction graph of a circuit should be **perfectly embedded** into the coupling map of a device.
 - Qubits with **lower read-out errors** and entangling gates with **lower errors** should be picked up.
 - Rely on the transpiler with a “transpiler-friendly” circuit or do it yourself!
- Circuit depth
 - A “**balanced**” tree of entangling gates should be pursued.
- Error mitigation / Error suppression

How we verify it?

- Want to quantify the closeness between what we want to prepare and what we generated on a real device.
- Different methods proposed.
- We adopt the one based on fidelity in [1].

[1] Otfried Gühne, Chao-Yang Lu, Wei-Bo Gao, and Jian-Wei Pan, “Toolbox for entanglement detection and fidelity estimation”, Phys. Rev. A 76, 030305 (2007)

Fidelity

- Quantifies the closeness between two density matrices.
- $F(\rho, \sigma) := \left(\text{tr}(\sqrt{\rho^{1/2} \sigma \rho^{1/2}}) \right)^2$ for two quantum states ρ and σ .
- $0 \leq F(\rho, \sigma) \leq 1$
- When ρ is a pure state $|\psi\rangle\langle\psi|$, $F(|\psi\rangle\langle\psi|, \sigma) = \langle\psi|\sigma|\psi\rangle = \text{Tr}(\sigma|\psi\rangle\langle\psi|)$.

Calculating $F(|\psi\rangle\langle\psi|, \sigma)$

- First, we have $\sqrt{|\psi\rangle\langle\psi|} = |\psi\rangle\langle\psi|$.
- Then, $\sqrt{|\psi\rangle\langle\psi|}\sigma\sqrt{|\psi\rangle\langle\psi|} = |\psi\rangle\langle\psi|\sigma|\psi\rangle\langle\psi| = \langle\psi|\sigma|\psi\rangle|\psi\rangle\langle\psi|$. (Note: $\langle\psi|\sigma|\psi\rangle$ is a scalar.)
- Therefore, $\sqrt{\sqrt{|\psi\rangle\langle\psi|}\sigma\sqrt{|\psi\rangle\langle\psi|}} = \sqrt{\langle\psi|\sigma|\psi\rangle}|\psi\rangle\langle\psi|$
- This leads to $\text{Tr}(\sqrt{\langle\psi|\sigma|\psi\rangle}|\psi\rangle\langle\psi|) = \sqrt{\langle\psi|\sigma|\psi\rangle}$.

Computing the Fidelity in our GHZ Experiment.

- What we want to prepare is:

$$|GHZ\rangle = \frac{1}{\sqrt{2}}(|0\rangle^{\otimes N} + |1\rangle^{\otimes N})$$

- Let ρ be the state our circuite generated on a real device. Then, what we want to compute is:

$$\begin{aligned} F(|GHZ\rangle\langle GHZ|, \rho) &= \text{Tr}(\rho |GHZ\rangle\langle GHZ|) \\ &= \frac{1}{2} \{ \text{Tr}(\rho |0\rangle\langle 0|^{\otimes N}) + \text{Tr}(\rho |1\rangle\langle 1|^{\otimes N}) + \text{Tr}(\rho (|0\rangle\langle 1|^{\otimes N} + |1\rangle\langle 0|^{\otimes N})) \} \end{aligned}$$

- By repeatedly preparing and measuring ρ with $Z^{\otimes N}$, we can obtain the first two of the traces.

Nice Formula

- We can write $|0\rangle\langle 1|^{\otimes N} + |1\rangle\langle 0|^{\otimes N}$ as

$$\frac{1}{N} \sum_{k=1}^N (-1)^k M_k$$

where $M_k = \left(\cos(k\pi/N)X + \sin(k\pi/N)Y \right)^{\otimes N}$.

- We then have

$$\text{Tr}(\rho (|0\rangle\langle 1|^{\otimes N} + |1\rangle\langle 0|^{\otimes N})) = \frac{1}{N} \sum_{k=1}^N (-1)^k \text{Tr}(\rho M_k).$$

- We can thus compute this with N local measurements with $Z^{\otimes N}$ after applying unitary transformations to

$$M_k = \left(R_z(k\pi/N) H Z H R_z(-k\pi/N) \right)^{\otimes N}.$$

Verifying the Formula

- First, we have

$$(-1)^k M_k = (-1)^k (\exp(-ik\pi/N) |0\rangle\langle 1| + \exp(ik\pi/N) |1\rangle\langle 0|)^{\otimes N}.$$

Expanding the RHS gives 2^N terms each of which is an N -fold tensor product.

- One of the terms is $|0\rangle\langle 1|^{\otimes N}$, whose coefficient is $(-1)^k \exp(-ik\pi/N)^N = 1$. Thus, taking the summation from $k = 1$ to N , the coefficient of this term ends up with N .
- Similarly, one of the terms is $|1\rangle\langle 0|^{\otimes N}$, whose coefficient is $(-1)^k \exp(ik\pi/N)^N = 1$. Thus, taking the summation from $k = 1$ to N , the coefficient of this term ends up with N .
- Each of the other terms has the coefficient of

$$(-1)^k \exp(-ik\pi/N)^m \exp(ik\pi/N)^{N-m} = \exp(i2k\pi(1 - m/N))$$

where $1 \leq m < N$ is the number of $|0\rangle\langle 1|$ in the tensor product. Taking the summation from $k = 1$ to N , the coefficient of this term ends up with zero.

What matters

- Qubit mapping and routing
 - The interaction graph of a circuit should be **perfectly embedded** into the coupling map of a device.
 - Qubits with **lower read-out errors** and entangling gates with **lower errors** should be picked up.
 - Rely on the transpiler with a “transpiler-friendly” circuit or do it yourself!
- Circuit depth
 - A “**balanced**” tree of entangling gates should be pursued.
- Error mitigation / Error suppression

Break

We then have a Jupyter notebook session.

IBM Quantum

Thank you